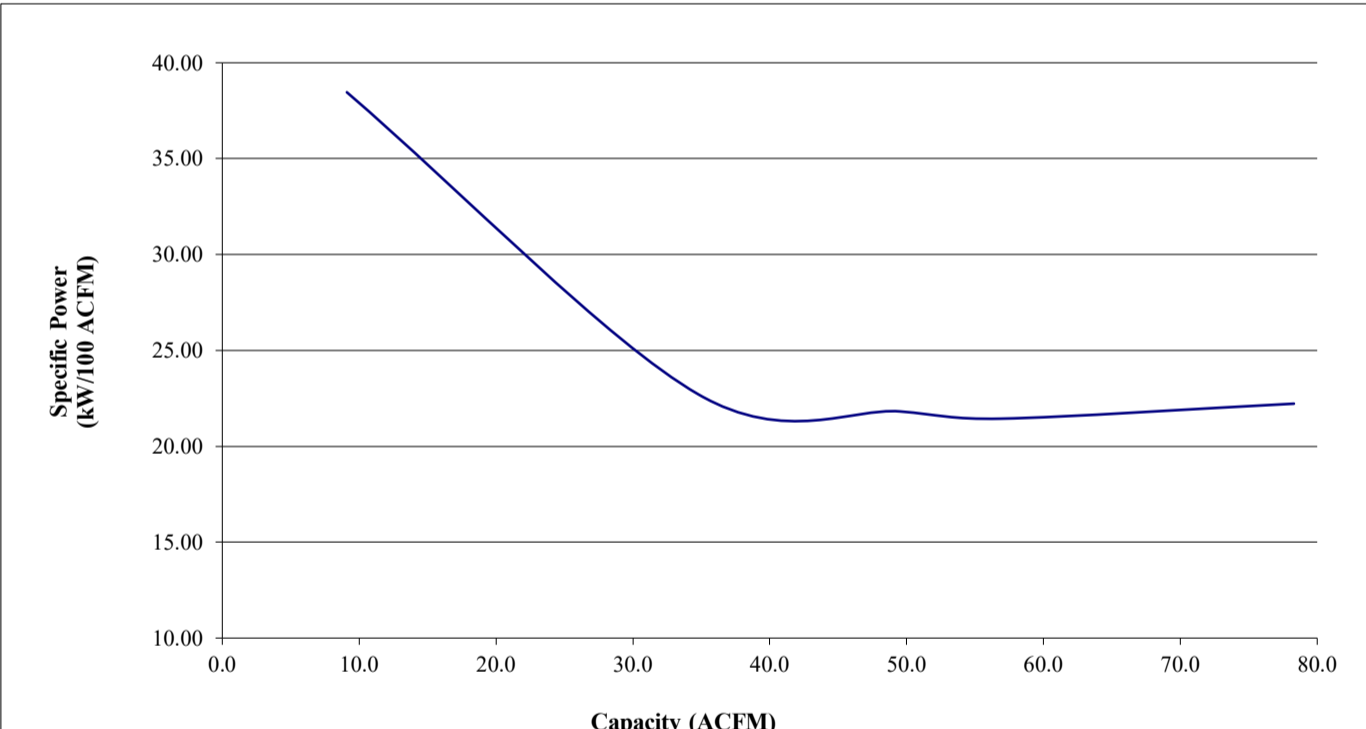


COMPRESSOR DATA SHEET

Rotary Compressor: Variable Displacement

MODEL DATA - FOR COMPRESSED AIR

| | | | |
|----|---|--------------------------------|---|
| 1 | Manufacturer: Chicago Pneumatic | | |
| 2 | Model Number: CPVsd 20 | Date: Jan-19 | |
| | <input checked="" type="checkbox"/> Air-cooled <input type="checkbox"/> Water-cooled | Type: Screw | |
| | <input checked="" type="checkbox"/> Oil-injected <input type="checkbox"/> Oil-free | # of Stages: 1 | |
| 3 | Rated Operating Pressure | 100 | psig ^b |
| 4 | Drive Motor Nominal Rating | 10 | hp |
| 5 | Drive Motor Nominal Efficiency | 91.0 | percent |
| 6 | Fan Motor Nominal Rating (if applicable) | N/A | hp |
| 7 | Fan Motor Nominal Efficiency | N/A | percent |
| 8* | Input Power (kW) | Capacity (acfm) ^{a,d} | Specific Power (kW/100 acfm) ^d |
| | 17.4 | 78.3 | 22.22 |
| | 12.2 | 56.9 | 21.44 |
| | 10.8 | 49.5 | 21.82 |
| | 7.9 | 34.8 | 22.70 |
| | 3.5 | Min | 9.1 |
| 9* | Total Package Input Power at Zero Flow ^{c,d} | | 0.0 kW |
| 10 |  <p style="text-align: center; font-size: small;"> Note: Graph is only a visual representation of the data in Section 8 Note: Y-Axis Scale, 10 to 35, + 5kW/100acfm increments if necessary above 35 X-Axis Scale, 0 to 25% over maximum capacity </p> | | |

*For models that are tested in the CAGI Performance Verification Program, these items are verified by the third party administrator
 Consult CAGI website for a list of participants in the third party verification program: www.cagi.org

NOTES:

- a. Measured at the discharge terminal point of the compressor package in accordance with ISO 1217, Annex E; ACFM is actual cubic feet per minute at inlet conditions.
- b. The operating pressure at which the Capacity and Electrical Consumption were measured for this data sheet.
- c. No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
- d. Tolerance is specified in ISO 1217, Annex E, as shown in table below:
 NOTE: The terms "power" and "energy" are synonymous for purposes of this document.



Member

| Volume Flow Rate at specified conditions | | Volume Flow Rate | Specific Energy Consumption | No Load / Zero Flow Power |
|--|-----------------------|------------------|-----------------------------|---------------------------|
| m ³ / min | ft ³ / min | % | % | |
| Below 0.5 | Below 15 | +/- 7 | +/- 8 | +/- 10% |
| 0.5 to 1.5 | 15 to 50 | +/- 6 | +/- 7 | |
| 1.5 to 15 | 50 to 500 | +/- 5 | +/- 6 | |
| Above 15 | Above 500 | +/- 4 | +/- 5 | |