



Chicago Pneumatic



CP Hose Reels



- ✓ **CP's most durable hose reels**
- ✓ **User friendly design**
- ✓ **Full reparability**



www.cp.com

People. Passion. Performance.

CP Hose Reels

Durable, Versatile & Easy to Repair

Improved Durability



QUALITY & SAFETY TESTED

The most durable hose reel range ever offered by Chicago Pneumatic



HIGHLY-INCREASED PARTS QUALITY

- Long-lasting parts
- Fully repairable in case of mishap




NEW CRIMPING SYSTEM

Maximum quality for the maximum robustness



RUBBER PROTECTION

Avoids any stress on the crimping, prolonging its life



RATCHET SPRING

Outside access for quick and low cost maintenance



DRUM SPRING

- Up to 25000 cycles
- Superior durability

QUALITY TESTS

- Continuous quality control ensures superior durability for up to 25000 cycles
- Higher reliability will reduce maintenance costs and downtime

SAFETY TESTS

Unique test procedure, to ensure maximum safety for the user.



With the maximum pressure (15 bars / 217 PSI) on every product




With twice the maximum pressure (30 bars / 435 PSI) on 1 product from every batch (100 units)




With 4 times the maximum pressure (60 bars / 870 PSI) on a random sample


Ergonomic features for an optimal comfort

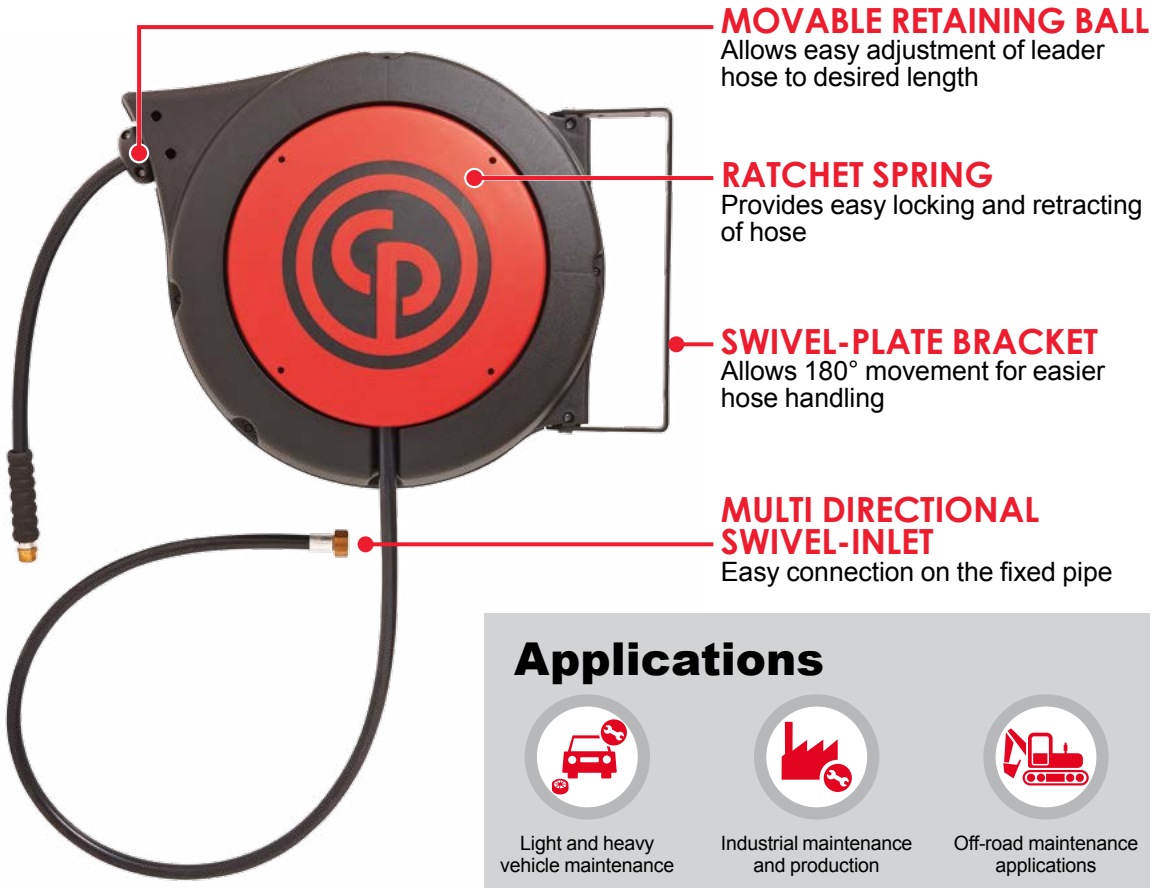


Applications



Light and heavy vehicle maintenance



Industrial maintenance and production



Off-road maintenance applications



NPT

MODEL	HOSE DIAMETER		PART NUMBER NPT	MATERIAL	TYPE	THREAD		HOSE LENGTH	
	in.	mm				in.	ft.	m	
HR8108	5/16	8	894 017 19 90	Composite	Closed	1/4	32.8	10	
HR8208	5/16	8	894 017 19 94	Aluminum	Closed	1/4	32.8	10	
HR8110	3/8	10	894 017 19 92	Composite	Closed	3/8	52.5	16	
HR8210	3/8	10	894 017 19 96	Aluminum	Closed	3/8	52.5	16	
HR9110	3/8	10	894 017 20 00	Composite	Open	3/8	68.9	21	
HR8113	1/2	13	894 017 19 98	Composite	Closed	1/2	52.5	16	
HR9113	1/2	13	894 017 20 02	Composite	Open	1/2	52.5	16	

BSP

MODEL	HOSE DIAMETER		PART NUMBER BSP	MATERIAL	TYPE	THREAD		HOSE LENGTH	
	in.	mm				in.	ft.	m	
HR8108	5/16	8	894 017 19 91	Composite	Closed	1/4	32.8	10	
HR8208	5/16	8	894 017 19 95	Aluminum	Closed	1/4	32.8	10	
HR8110	3/8	10	894 017 19 93	Composite	Closed	3/8	52.5	16	
HR8210	3/8	10	894 017 19 97	Aluminum	Closed	3/8	52.5	16	
HR9110	3/8	10	894 017 20 01	Composite	Open	3/8	68.9	21	
HR8113	1/2	13	894 017 19 99	Composite	Closed	1/2	52.5	16	
HR9113	1/2	13	894 017 20 03	Composite	Open	1/2	52.5	16	

Listed specifications are for reference only. Please refer to tool documentation for additional information.



Over 110 years of experience

Since 1901 the Chicago Pneumatic (CP) name has represented reliability and attention to customer needs, with construction, maintenance and production tools and compressors designed for specific industrial applications. Today, CP has a global reach, with local distributors around the world.

Our people start every single day with a passion to research, develop, manufacture and deliver new products that are meant to meet your needs not only today, but tomorrow as well.

To learn more about our extensive range of tools, construction equipment, industrial and portable compressors, accessories and workshop equipment, please visit www.cp.com.

AIR LINE ACCESSORIES SELECTION

FILTER-REGULATOR-LUBRICATOR

FRL units will improve the productivity and lifetime of your CP tools.

PART # NPT	PART # BSP	SIZE	TYPE	MAX. FLOW RATE	
		in.		cfm	l/sec

Metallic - 2 stage

894 016 8515	894 016 8478	1/4	2 stage	24	11
894 016 8517	894 016 8480	1/2	2 stage	110	50
894 016 8519	894 016 8483	3/4	2 stage	220	100

Composite - 2 stage


894 017 1944	894 017 1927	1/4	2 stage	74	34
894 017 1945	894 017 1928	3/8	2 stage	76	35
894 017 1946	894 017 1929	1/2	2 stage	96	44

FRL STAND PART #	DESCRIPTION
615 812 0450	FRL stand for 2 stage 1/2" metallic FRL (frame only)

PART # NPT	PART # BSP	SIZE	TYPE	MAX. FLOW RATE	
		in.		cfm	l/sec

Metallic - 3 stage

894 016 8516	894 016 8479	1/4	3 stage	24	11
894 016 8518	894 016 8481	1/2	3 stage	110	50
894 016 8520	894 016 8484	3/4	3 stage	220	100

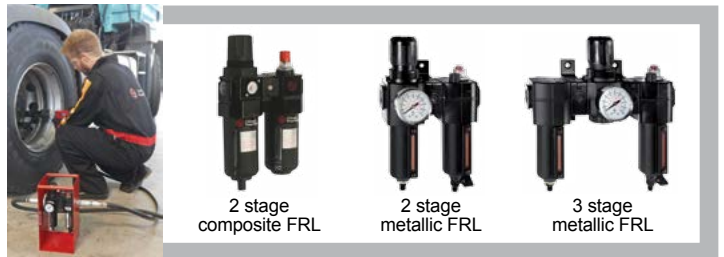

2 stage composite FRL


2 stage metallic FRL

3 stage metallic FRL

AIR FLEX SWIVEL CONNECTOR

The 360° Experience

UNIQUE FEATURES
Accessories

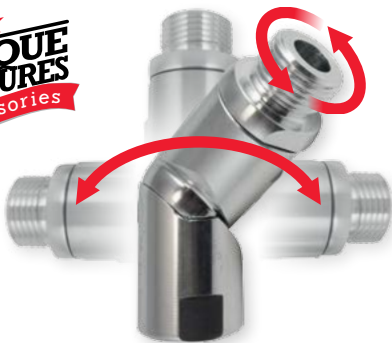

MODEL	PART NUMBER	FEMALE INLET	MALE INLET	MAX RECOMMENDED AIR FLOW	
		in.	in.	l/s	cfm
NPT					
Air Flex 1/4"	894 017 1569	1/4 NPT	1/4 NPT	12	25
Air Flex 1/4" with cover	894 017 2157	1/4 NPT	1/4 NPT	12	25
Air Flex 3/8"	894 017 1571	3/8 NPT	3/8 NPT	35	74
Air Flex 1/2"	894 017 1567	1/2 NPT	1/2 NPT	35	74
BSP					
Air Flex 1/4"	894 017 1568	1/4 BSP	1/4 BSP	12	25
Air Flex 1/4" with cover	894 017 2156	1/4 BSP	1/4 BSP	12	25
Air Flex 3/8"	894 017 1570	3/8 BSP	3/8 BSP	35	74
Air Flex 1/2"	894 017 1566	1/2 BSP	1/2 BSP	35	74