




MODEL	CP8613
Part number	6151 5700 00
Energy supply	36V Battery




PCF value
248 kg / 547 lbs
CO₂e/unit*

Based on the ISO 14067:2018 standard, Product Carbon Footprint [PCF] sums up the total greenhouse gas emissions generated by a product over the different stages of its life cycle.


Sources of CO₂ emissions

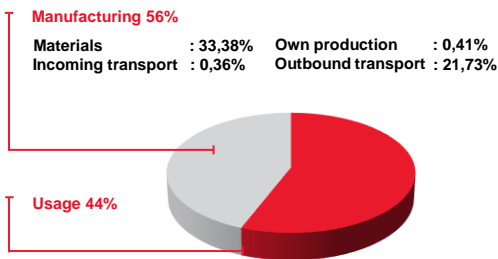

CO₂ emissions per material category

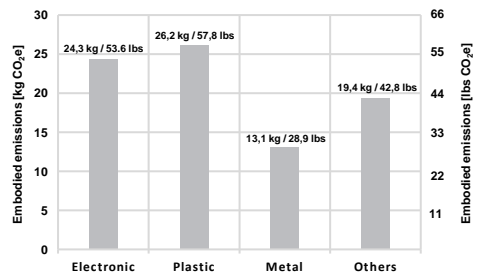


Customer Delivery

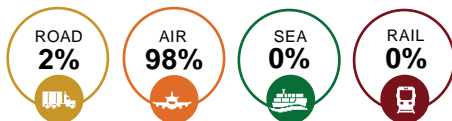

Transport emissions
49,2 kg / 108,47 lbs CO₂e/unit*

Production Location

- Main component supply locations:

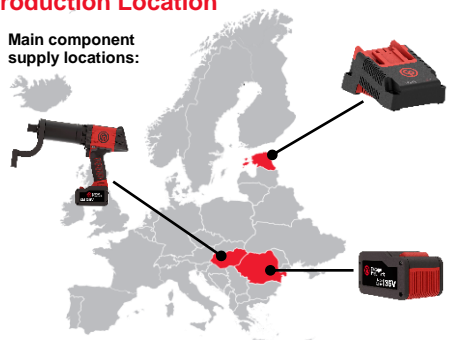

**MORE THAN 7 TIMES LESS CO₂ EMISSIONS WITH CP86
compared to a pneumatic solution**

CP8613

PCF value
248 kg / 547 lbs
CO₂e/unit*




VS



CP6613

PCF value
1909 kg / 4209 lbs
CO₂e/unit*

CARBON FOOTPRINT SCALE

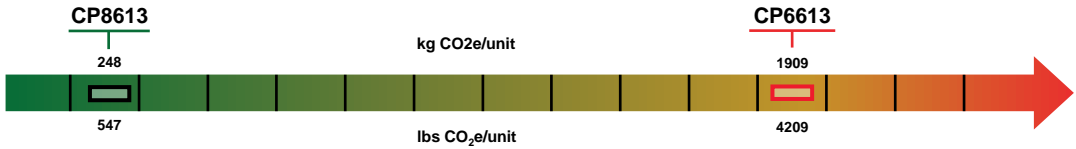

Energy saved
3611 kWh



Equivalent to CO₂ absorbed by
28 ten-year-old trees



CP8613
CO₂ savings equivalencies*



Equivalent to gasoline powered car CO₂
emission for **6837 km / 4248 miles**



Equivalent to energy used to charge
110000 smartphones

Sources: U.S Environmental Protection Agency / International Energy Agency

PCF value for 5 years of the tool's lifetime (including battery, charger, and CP8613 case) is based on the following generic usage assumptions:

- Mining: 250 days/year, 2 hours/day, 3 cycles of 6.885 seconds per minute (34% running time)
- General Maintenance: 30 days/year, 2 hours/day, 3 cycles of 6.885 seconds per minute (34% running time)

For a customized result please contact your local CP representative.