


**COMPRESSOR DATA SHEET**
**In Accordance With Federal Uniform Test Method for Certain Lubricated Air Compressors**
**Rotary Compressor: Variable Frequency Drive**
**MODEL DATA - FOR COMPRESSED AIR**

1	Manufacturer: <b>Chicago Pneumatic</b>		
2	Model Number: <b>CPVsd 34 26kW</b>	Date:	<b>08/16/23</b>
	<input checked="" type="checkbox"/> Air-cooled <input type="checkbox"/> Water-cooled	Type:	<b>Screw</b>
		# of Stages:	<b>1</b>
3*	Full Load Operating Pressure <sup>b</sup>	<b>100</b>	psig <sup>b</sup>
4	Drive Motor Nominal Rating	<b>35</b>	hp
5	Drive Motor Nominal Efficiency	<b>92.4</b>	percent
6	Fan Motor Nominal Rating (if applicable)	<b>1.15</b>	hp
7	Fan Motor Nominal Efficiency	<b>32.7</b>	percent
8*	Input Power (kW)	Capacity (acfm) <sup>a,d</sup>	Specific Power (kW/100 acfm) <sup>d</sup>
	32.2	<b>148</b>	<b>21.80</b>
	24.4	<b>118</b>	<b>20.70</b>
	18.8	<b>92</b>	<b>20.60</b>
	12.7	<b>61</b>	<b>20.90</b>
	7.0	<b>30</b>	<b>23.50</b>
9*	Total Package Input Power at Zero Flow <sup>c, d</sup>	<b>0.0</b>	<b>kW</b>
10	Isentropic Efficiency	<b>61.1</b>	<b>%</b>
11	 <p style="text-align: center;"> <b>Note: Graph is only a visual representation of the data in Section 8</b>  <small>Note: Y-Axis Scale, 10 to 35, + 5kW/100acfm increments if necessary above 35  X-Axis Scale, 0 to 25% over maximum capacity</small> </p>		

\*For models that are tested in the CAGI Performance Verification Program, these items are verified by the third party administrator  
Consult CAGI website for a list of participants in the third party verification program: [www.cagi.org](http://www.cagi.org)

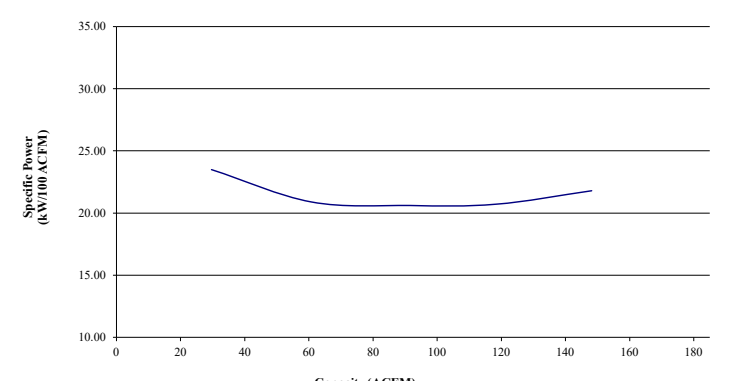

Member

- NOTES:
- Measured at the discharge terminal point of the compressor package in accordance with ISO 1217, Annex E; ACFM is actual cubic feet per minute at inlet conditions.
  - The operating pressure at which the Capacity (Item 8) and Electrical Consumption (Item 8) were measured for this data sheet.
  - No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
  - Tolerance is specified in ISO 1217, Annex E, as shown in table below:  
NOTE: The terms "power" and "energy" are synonymous for purposes of this document.

Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy Consumption	No Load / Zero Flow Power
m <sup>3</sup> / min	ft <sup>3</sup> / min	%	%	%
Below 0.5	Below 17.6	+/- 7	+/- 8	
0.5 to 1.5	17.6 to 53	+/- 6	+/- 7	+/- 10%
1.5 to 15	53 to 529.7	+/- 5	+/- 6	
Above 15	Above 529.7	+/- 4	+/- 5	

ROT 031.1