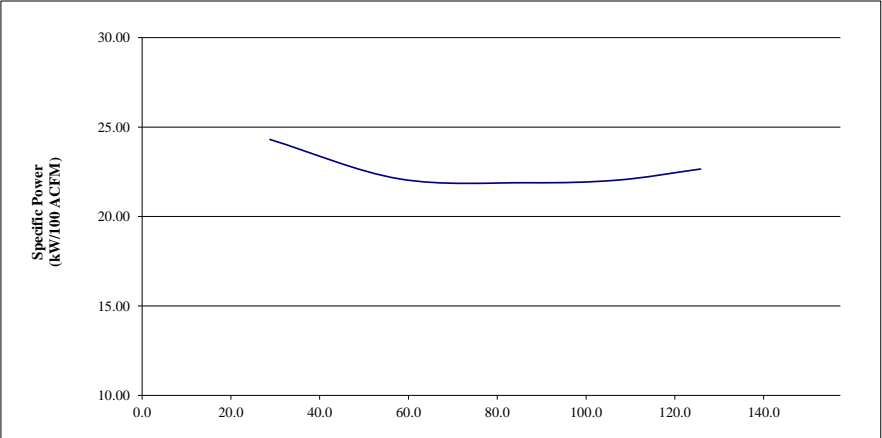


COMPRESSOR DATA SHEET

Rotary Compressor: Variable Displacement

MODEL DATA - FOR COMPRESSED AIR

1	Manufacturer:	Chicago Pneumatic		
2	Model Number:	CPVsd 29	Date:	Oct-19
	<input checked="" type="checkbox"/> Air-cooled <input type="checkbox"/> Water-cooled		Type:	Screw
	<input checked="" type="checkbox"/> Oil-injected <input type="checkbox"/> Oil-free		# of Stages:	1
3	Rated Operating Pressure	125	psig ^b	
4	Drive Motor Nominal Rating	30	hp	
5	Drive Motor Nominal Efficiency	92.4	percent	
6	Fan Motor Nominal Rating (if applicable)	N/A	hp	
7	Fan Motor Nominal Efficiency	N/A	percent	
8*	Input Power (kW)	Capacity (acfm) ^{a,d}	Specific Power (kW/100 acfm) ^d	
	28.5	125.8	22.66	
	23.6	107.1	22.04	
	19.0	86.8	21.89	
	12.8	57.9	22.11	
	7.0	Min	28.8	24.31
9*	Total Package Input Power at Zero Flow ^{c, d}		0.0	kW
10	 <p style="text-align: center; font-size: small;"> Note: Graph is only a visual representation of the data in Section 8 Note: Y-Axis Scale, 10 to 30, + 5kW/100acfm increments if necessary above 35 X-Axis Scale, 0 to 25% over maximum capacity </p>			

*For models that are tested in the CAGI Performance Verification Program, these items are verified by the third party administrator. Consult CAGI website for a list of participants in the third party verification program: www.cagi.org

NOTES:

- a. Measured at the discharge terminal point of the compressor package in accordance with ISO 1217, Annex E; ACFM is actual cubic feet per minute at inlet conditions.
- b. The operating pressure at which the Capacity and Electrical Consumption were measured for this data sheet.
- c. No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
- d. Tolerance is specified in ISO 1217, Annex E, as shown in table below:
 NOTE: The terms "power" and "energy" are synonymous for purposes of this document.



Member

Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy Consumption	No Load / Zero Flow Power
m ³ / min	ft ³ / min	%	%	
Below 0.5	Below 15	+/- 7	+/- 8	+/- 10%
0.5 to 1.5	15 to 50	+/- 6	+/- 7	
1.5 to 15	50 to 500	+/- 5	+/- 6	
Above 15	Above 500	+/- 4	+/- 5	